



ULTRALITE 260


SPECIFICATIONS

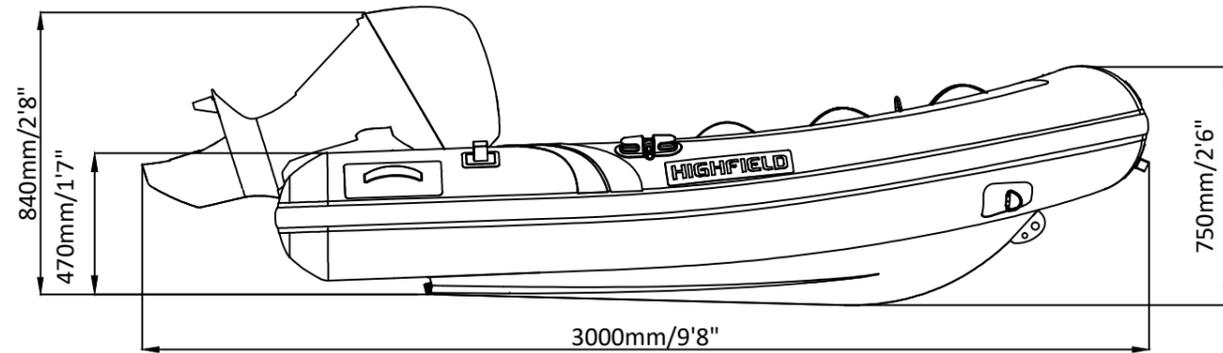


Side View

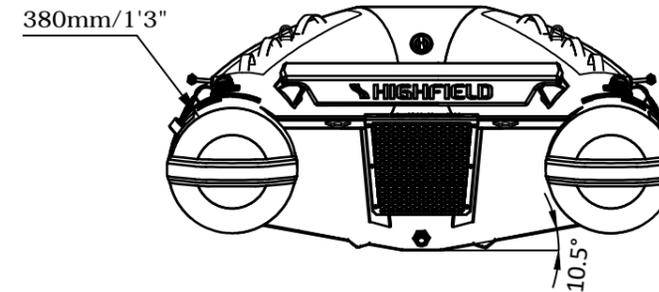

Rear View

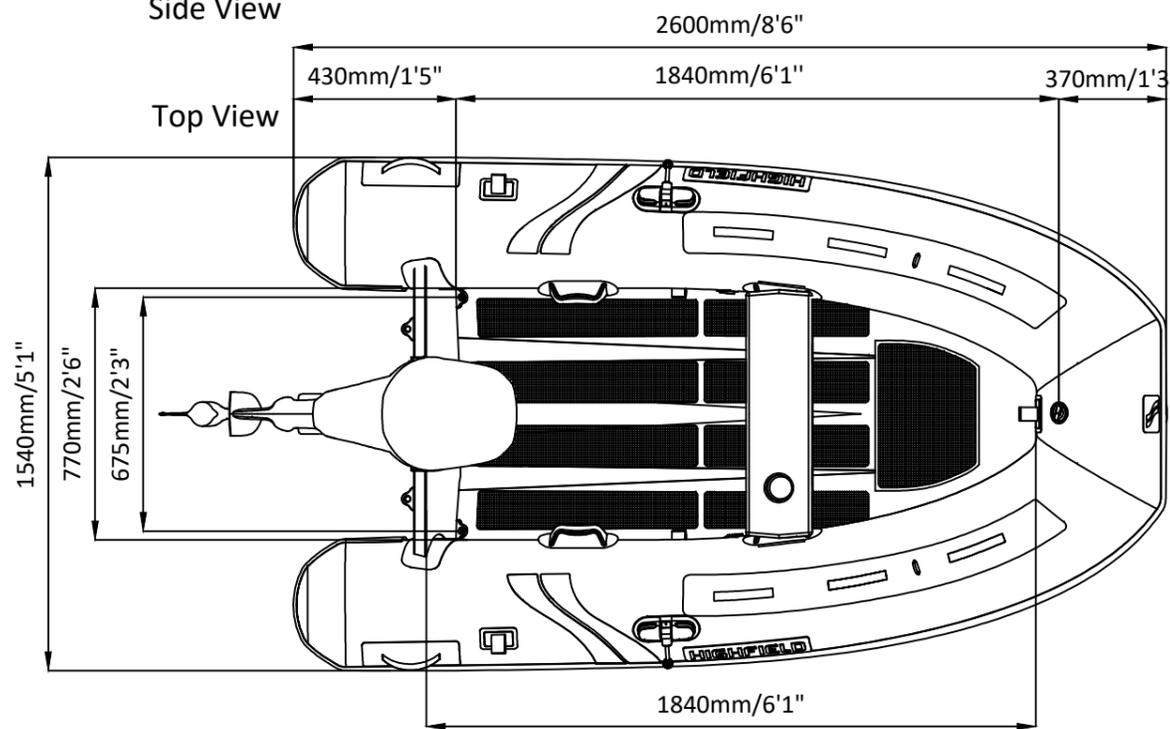

Top View

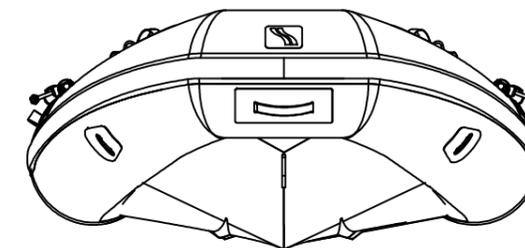

Front View



SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice. Tolerances: Dimensions ±2.5% Weight ±5%)

MODEL	ISO 6185 PART	ISO 6185			#			Shaft	Outboard Engine				Molded seat		Oar		Fuel tank Capacity	Rollbar		Wet Weight (Approximate) 6HP (4.48KW) +Fuel		AIR CHAMBERS				
			KG	LB		KG	LB		Max power	Max weight	KG	LB	KG	LB	L	KG		LB	KG	LB	PSI		BAR			
									KW	HP	KG	LB														
UL260	2	C	340	750	3+1	263	579	S	4.48	6	40.9	90	32	70	2.5	5.5	2	4.4	/	/	/	92.4	203.7	3	3.63	0.25


Weight: Boat only, not including molded seat, oars and other accessories.

ULTRALITE 260LT

SPECIFICATIONS

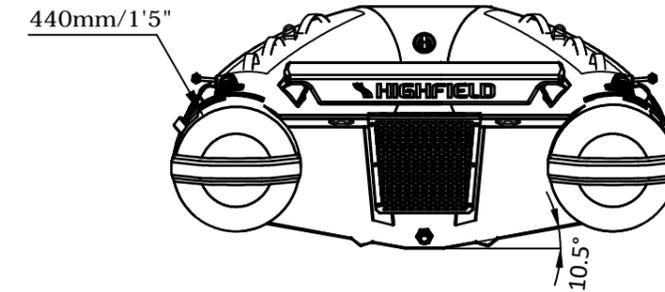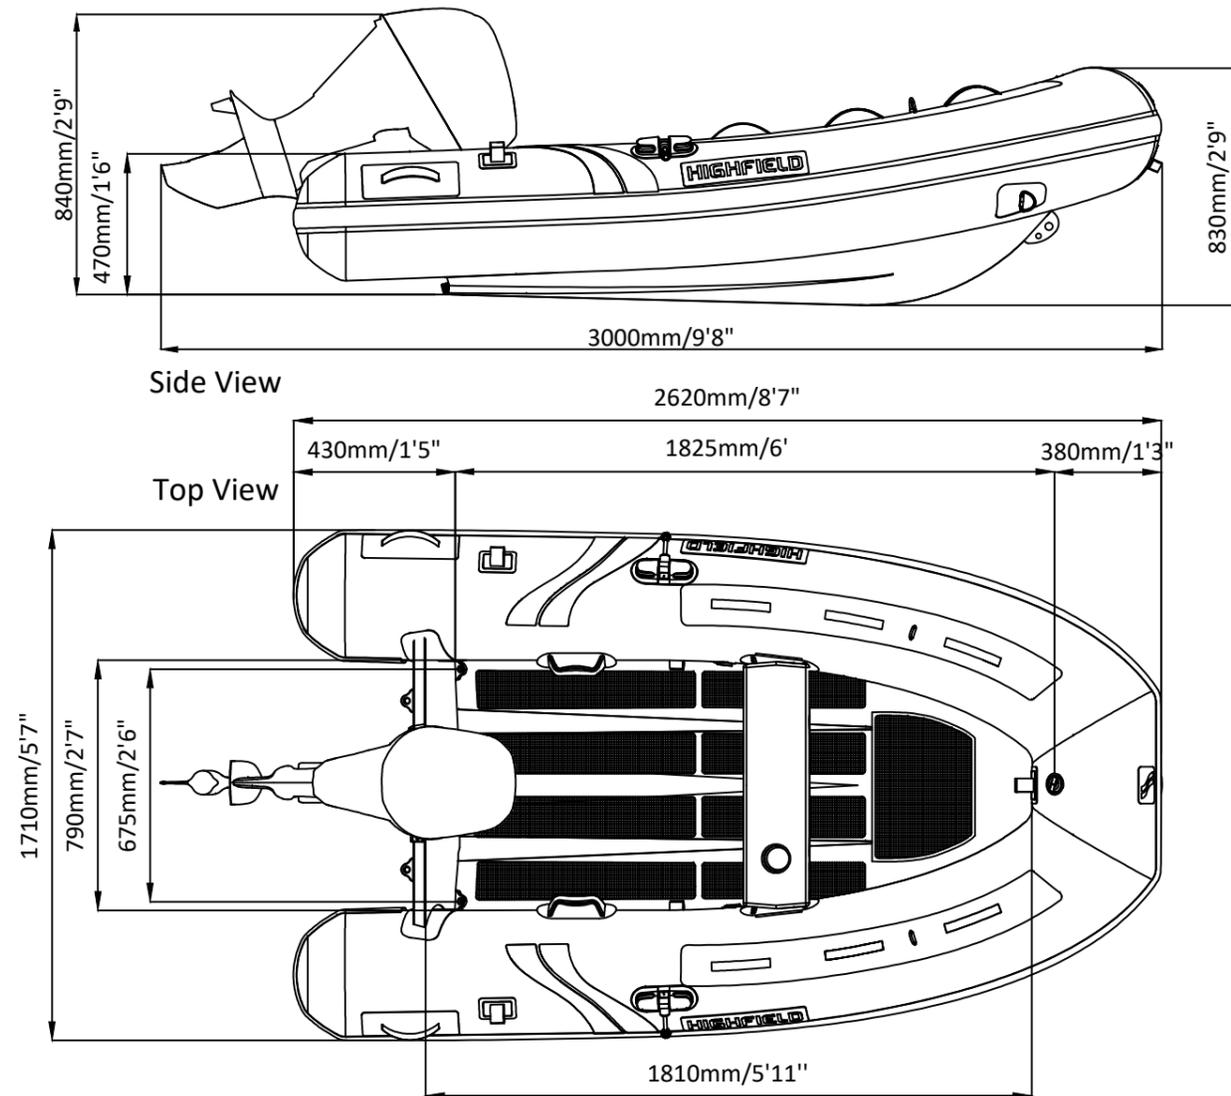

Rear View

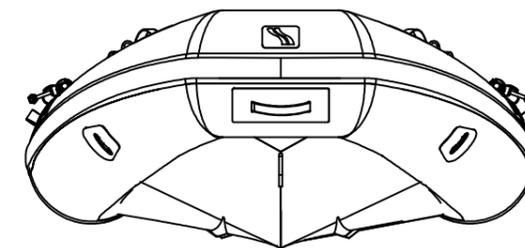

Front View

SPECIFICATIONS AND MAXIMUM CAPACITIES (Subject to change without notice. Tolerances: Dimensions ±2.5% Weight ±5%)

MODEL	ISO 6185 PART	ISO 6185	Passengers		#	Weight		Shaft	Outboard Engine		Molded seat		Oar		Fuel tank Capacity	Rollbar		Wet Weight (Approximate) 10HP (7.46KW) +Fuel		AIR CHAMBERS	Pressure					
			KG	LB		KG	LB		KG	LB	KG	LB	L	KG		LB	KG	LB	PSI		BAR					
UL260LT	2	C	358	789	3+1	263	579	S	7.46	10	60	132	36.5	80	2.5	5.5	2	4.4	/	/	/	108.3	239	3	3.63	0.25

Weight: Boat only, not including molded seat, oars and other accessories.